


Label Specification



3110 EP

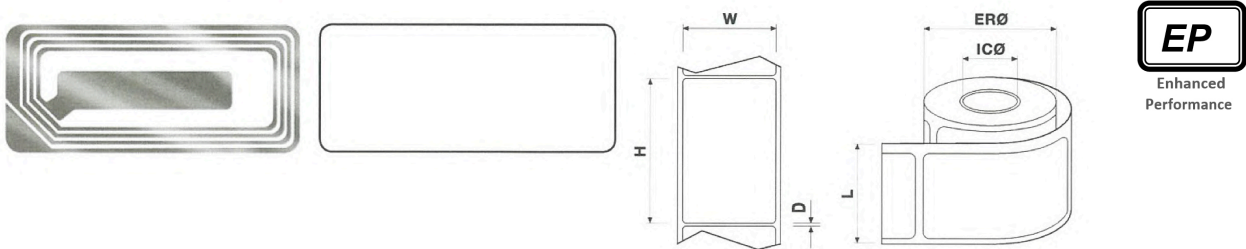

	2K = 2,000 Labels	4K = 4,000 Labels
Product Description	3110 EP	3110 EP
Part No:	7123511	7387589
Label Dimensions (WxH):	22 x 47 mm / 0.866" x 1.85"	22 x 47 mm / 0.866" x 1.85"
Distance between labels (D):	2.30 mm / 0.0906"	2.30 mm / 0.0906"
Linear Width (L):	21 mm / 0.8268"	21 mm / 0.8268"
External Roll Diameter (ER):	216 mm / 8.5"	279 mm / 11"
Inner Core Diameter (IC):	76.2 mm / 3"	76.2 mm / 3"
Face Sheet:	White Thermal Transfer	White Thermal Transfer
Adhesive:	Permanent, general purpose	Permanent, general purpose
Labels per roll:	2,000	4,000
Labels per case:	10 x 2K (20,000)	5 x 4K (20,000)
Weight roll:	1.12 kg / 2.5 lbs	2.72 kg / 6.0 lbs
Weight case:	11.03 kg / 25 lbs	13.6 kg / 30 lbs
Frequency (MHz) ± 5%:	8.2 MHz	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.2 kv (minimum)	7.2 kv (minimum)
*Minimal Order Quantity (MOQ)	2,000 (1 Roll)	4,000 (1 Roll)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2019
All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.
Last Modified: 05/02/2019

checkpointsystems.com