


# Label Specification



## 710HA DBC DE 8.2 QRL

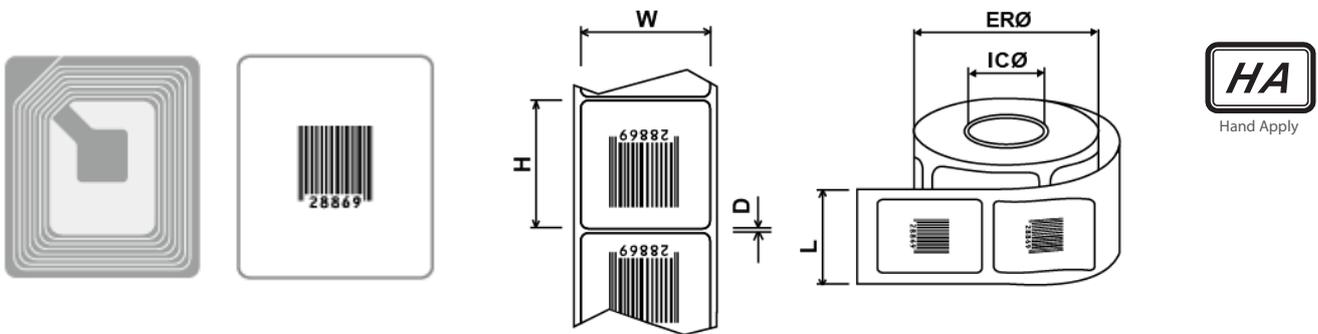

### 2000 Good Labels Per Tray

<b>Product Description</b>	710HA DBC DE 8.2 QRL
<b>Part No:</b>	7232019
<b>Label Dimensions (WxH):</b>	34x39 mm / 1.34"x1.54"
<b>Distance between labels (D):</b>	3.2 mm / 0.13"
<b>Linear Width (L):</b>	36 mm / 1.42"
<b>External Roll Diameter (ER):</b>	Ø 90 mm / 3.54"
<b>Inner Core Diameter (IC):</b>	Ø 25.4 mm / 1.0"
<b>Face Sheet:</b>	White Coated Paper with Barcode Print
<b>Adhesive:</b>	All Purpose Grade
<b>Labels per roll:</b>	500
<b>Labels per tray:</b>	2000 (4 rolls Shrink Wrap)
<b>Labels per case:</b>	20,000 (40 rolls)
<b>Approx. Weight roll:</b>	0.21 kg / 0.46 lbs.
<b>Approx. Weight case:</b>	8.4 kg / 18.52 lbs.
<b>Frequency (MHz) ± 5%:</b>	8.2 MHz
<b>Electrostatic Discharge Tolerance (ESD):</b>	1.5kv
<b>*Minimum Order Quantity (MOQ):</b>	1 Tray / 2000 labels

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years\*\*

• Cases should never be stacked more than 5 high.

\* Unless otherwise specified in contractual conditions

\*\* RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2019  
All information and illustrations are intellectual property of Checkpoint Systems, Inc.  
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.  
Last Modified: 05/02/2019

[checkpointsystems.com](http://checkpointsystems.com)