

Label Specification



3710XP,8.2,QRL DE,BIL ,1"



**Xform
Performance**



Front

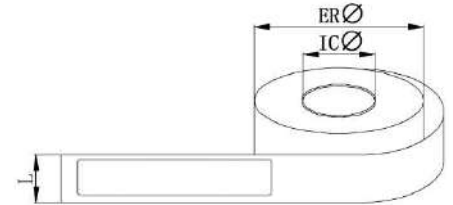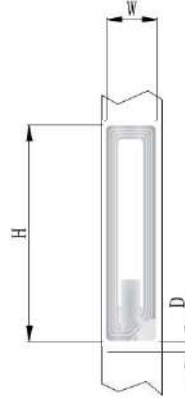

Product Description	3710XP,8.2,QRL DE,BIL,1"
Part No:	10154164
Label Dimensions (W*H):	15.1mm*52mm/0.59"*2.05"
Distance between labels (D):	2.54mm/0.1"
Liner Width (L):	17.1mm / 0.67"
External Roll Diameter (ER):	Ø100 mm /3.94
Inner Core Diameter (IC):	Ø25.4 mm / 1"
Face Sheet:	Clear PET
Adhesive:	All Purpose Grade
Labels per roll:	500 Pcs/roll(4 rolls/Tray)
Labels per case:	20,000Pcs
Approx. Weight roll:	0.14 kg /0.31 lbs.
Approx. Weight case:	6.87 kg /15.15 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	9.8KV(Minimum)
*Minimal Order Quantity (MOQ)	20,000Pcs(1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



RoHS ✓
REACH ✓

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2022
All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.

Last Modified: 11 / 02 / 2022

checkpointsystems.com