
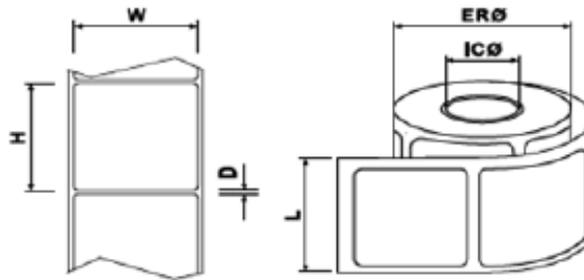


# Label Specification

2933 EP White

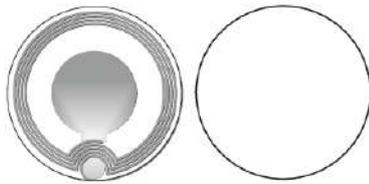

<b>Product Description</b>	2900 EP 33mm Round WH HA FRL
<b>Part No:</b>	7666078
<b>Label Dimensions (WxH):</b>	33mm round (1.29")
<b>Distance between labels (D):</b>	2.29mm (0.09")
<b>Linear Width (L):</b>	35 (1.38")
<b>External Roll Diameter (ER):</b>	180mm (8.0")
<b>Inner Core Diameter (IC):</b>	76mm (3")
<b>Face Sheet:</b>	White Thermal Transfer Paper
<b>Adhesive:</b>	Permanent Adhesive
<b>Labels per roll:</b>	2,000
<b>Labels per case:</b>	20,000
<b>Weight roll:</b>	0.7kg (1.54 lbs)
<b>Weight case:</b>	7kg (15.4 lbs)
<b>Frequency (MHz) ± 5%:</b>	8.2 Mhz
<b>Electrostatic Discharge Tolerance (ESD):</b>	2.5 kv (minimum)
<b>*Minimal Order Quantity (MOQ)</b>	2,000 (1 Roll)

**Storage conditions:** Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years\*\*

• Cases should never be stacked more than 5 high.

\* Unless otherwise specified in contractual conditions

\*\* RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.