


Label Specification


3740XP FD HA ,8.2, 2KR DE, Plain



Xform
Performance



Front

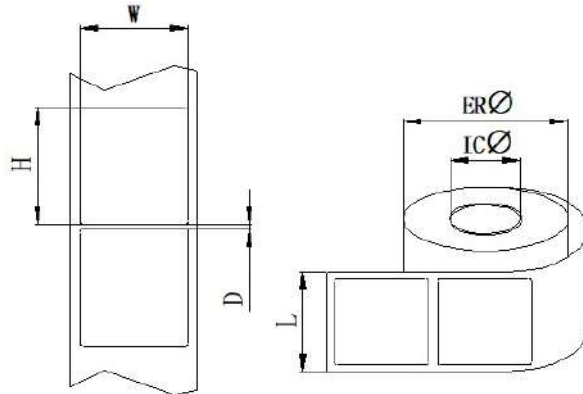

Product Description	3740XP FD HA,8.2,2KR DE, Plain
Part No:	10153349
Label Dimensions (W*H):	37 mm*40 mm / 1.46"*1.57"
Distance between labels (D):	2.4 mm/0.09"
Liner Width (L):	39 mm / 1.54"
External Roll Diameter (ER):	Ø 190 mm / 7.48"
Inner Core Diameter (IC):	Ø 76.2 mm / 3"
Face Sheet:	White Thermal Transfer Paper
Adhesive:	All Purpose Grade (Indirect Contact approved)
Labels per roll:	2,000 Pcs
Labels per case:	20,000 Pcs (10 rolls)
Approx. Weight roll:	1.05kg/ 2.31 lbs.
Approx. Weight case:	11.6kg/25.57 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	3.9KV(Minimum)
*Minimal Order Quantity (MOQ)	20,000 Pcs (1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



RoHS ✓
REACH ✓

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2019
All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.

Last Modified: 09/15/2022

checkpointsystems.com