


Label Specification



2410XP,8.2,0.667KR DE, Plain, 1”



**Xform
Performance**



Front

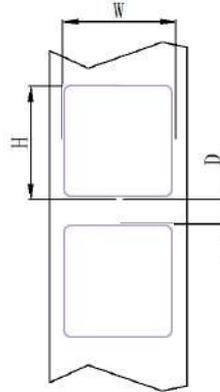

Product Description	2410XP,8.2,0.667KR DE, Plain, 1”
Part No:	10154063
Label Dimensions (Diameter)(W*H):	23.7*25.4 mm / 0.93”*1”
Distance between labels (D):	2.54mm/0.1”
Liner Width (L):	25.7mm / 1.01”
External Roll Diameter (ER):	Ø98 mm /3.86”
Inner Core Diameter (IC):	Ø 25.4 mm / 1”
Face Sheet:	White Premium Grade Paper
Adhesive:	All Purpose Grade
Labels per roll:	667 Pcs per roll, 3 rolls per tray
Labels per case:	20,000Pcs (30 rolls)
Approx. Weight roll:	0.175 kg / 0.39lbs.
Approx. Weight case:	6.35 kg / 14.00 lbs.
Frequency (MHz) ± 5%:	8.2 ±5% MHz
Electrostatic Discharge Tolerance (ESD):	4.7KV(Minimum)
*Minimal Order Quantity (MOQ)	20,000 Pcs (1 carton)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.



RoHS
REACH

All rights reserved © Checkpoint Systems Inc. Thorofare, USA 2022
All information and illustrations are intellectual property of Checkpoint Systems, Inc.
Any copying, reprinting, manipulating or publishing in part or in whole is strictly prohibited.

Last Modified:11/09/2022

checkpointsystems.com