
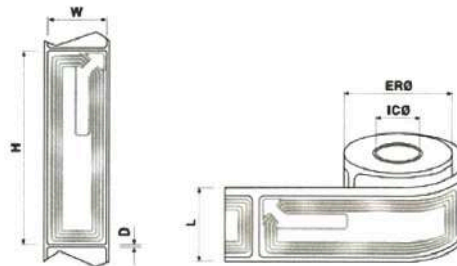


Label Specification

3210 EP

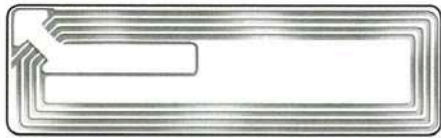

2K = 2,000 Labels

Product Description	3210 EP
Part No:	7223155
Label Dimensions (WxH):	19 x 65 mm / 0.866" x 1.85"
Distance between labels (D):	2.30 mm / 0.0906"
Linear Width (L):	21 mm / 0.827"
External Roll Diameter (ER):	216 mm / 8.5"
Inner Core Diameter (IC):	76.2 mm / 3"
Face Sheet:	Clear Polypropylene
Adhesive:	Permanent, general purpose
Labels per roll:	2,000
Labels per case:	10 x 2K (20,000)
Weight roll:	0.90 kg / 1.91 lbs
Weight case:	9.04 kg / 20 lbs
Frequency (MHz) \pm 5%:	8.2 MHz
Electrostatic Discharge Tolerance (ESD):	7.2 kv (minimum)
*Minimal Order Quantity (MOQ)	2,000 (1 Roll)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.