



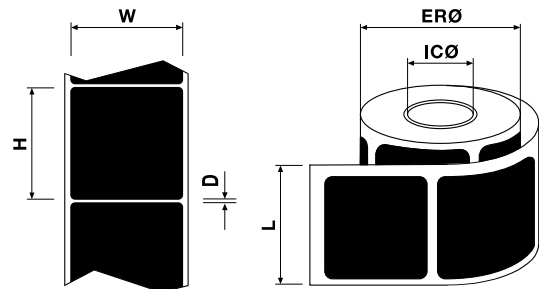

410 HA BLACK



Characteristics	TR = Tray = 2,000 Labels
Product Description	410 HA Black
Part No:	7283986
Label Dimensions (WxH):	37.72 x 39.83 mm / 1.5" x 1.6"
Distance between labels (D):	2.29 mm / 0.09"
Liner Width (L):	39.37 mm / 1.5"
External Roll Diameter (ER):	Ø 98 mm / 3.6"
Inner Core Diameter (IC):	Ø 38 mm / 1.5"
Face Sheet:	Black Uncoated Litho Paper
Adhesive:	Permanent, general purpose
Good Labels per roll:	500
Good Labels per case:	500 x 4 x 10 (20,000)
Weight roll:	1.04 kg / 2.3 lbs
Weight case:	10.40 kg / 22.92 lbs
Frequency (MHz) +/-5%:	8.2 MHz
Electrostatic Discharge	
Tolerance (ESD):	1.5Kv (minimum)
*Minimum order quantity (MOQ)	1 Tray = 4 x 500 (2,000)

Storage conditions: Keep dry and do not expose to direct sunlight • Recommended storage temperature: 18 to 29 °C
Maximum temperature should not exceed 43 °C • Maximum shelf life of RF labels when stored in recommended conditions is 2 years** • Cases should never be stacked more than 5 high • All rolls are wound with the labels facing out

*Unless otherwise specified in contractual conditions

**RF circuits have no expiry date, however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other EAS labelling process contact your local Checkpoint representative.