


Label Specification



2928 XP Micro Clear Label 2KR



Xform
Performance

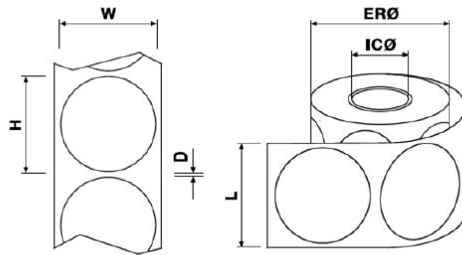

2k = 2,000 Labels

Product Description	2928 XP BIL, DE, 8.2 2KR 76
Part No:	10148866
Label Dimensions (Diameter):	28mm /1.1102"
Distance between labels (D):	2.3mm/0.0917"
Linear Width (L):	30mm/1.181"
External Roll Diameter (ER):	165mm/6.5"
Inner Core Diameter (IC):	76.2mm/3"
Face Sheet:	Clear Polyester (PET)
Adhesive:	Tamper Grade
Labels per roll:	2,000pcs
Labels per case:	20,000
Weight roll:	0.45Kg/1 lb
Weight case:	4.5Kg/10lbs
Frequency (MHz) ± 5%:	8.2 MHz ± 400kHz
Electrostatic Discharge Tolerance (ESD):	3,000V
*Minimal Order Quantity (MOQ)	2,000(1 Roll)

Storage conditions: Keep dry but do not expose to direct sunlight • Recommended storage temperature: 18 to 29°C Maximum temperature should not exceed 43°C • Maximum shelf life of RF labels when stored in recommended conditions in 2 years**

• Cases should never be stacked more than 5 high.

* Unless otherwise specified in contractual conditions

** RF circuits have no expiry date; however the adhesive has a useful working life of 2 years from the date of manufacture

For any questions regarding this or any other labelling process contact your local Checkpoint representative.